



FL3X

Switch 1000/10GBASE-T1 H-MTD

www.flex-product.com

BENEFITS

- 7 x 100/1000BASE-T1 with H-MTD® connector
- 1 x 10GBASE-T1 port with H-MTD® connector
- 1 x SFP+ port
- 1x MultiGig Port up to 10GBASE-T1
- Marvell 88Q6113 Switch Chip
- Fully compliant with IEEE802.3
- Supply voltage: 8 to 48 V DC
- IP20
- H-MTD® connectors
- Temperature range -40°C to +85°C
- Integrated RTC (Real Time Clock)
- 802.1 AS PTP support for master/slave and transparent clock

FL3X SWITCH 1000/10GBASE-T1 H-MTD

The Switch provides 7 x 100/1000BASE-T1 ports and one 2.5G/5G/10GBASE-T1 port. Additionally one SFP+ port up to 10G. The switch is based on the 1000BASE-T1 Marvell Switch Chips 88Q6113, it can easily be configured by using proprietary software provided by Marvell.

SOFTWARE SUPPORT

- Configuration Software for Windows and Linux from Marvell


FL3X Switch 1000/10GBASE-T1 H-MTD

TECHNICAL FEATURES

This switch includes a high-performance ARM® Cortex M7 CPU with dedicated on-chip memory to support AVB protocols such as Precision Time Protocol (PTP) and security firewall to protect from external malicious attacks. The switch employs advanced routing engine to support gigabit routing of the incoming packets without the CPU intervention. It offers highest level of security with deep packet inspection (DPI) techniques, Denial of Service (DoS) engine and Trusted Boot functionality to secure the vehicle networks.

- 7 x 100/1000BASE-T1 ports
- One separate connector per port
- 100BASE-T1 or 1000BASE-T1 mode on every connector selectable
- 1 x SFP+ port
- 1 x 2.5G/5G/10GBASE-T1 port
- 1000BASE-T1 SFP transceiver available
- 10GBASE-T SFP+ transceiver available
- 1000BASE-T SFP transceiver available
- Fully IEEE802.3 compliant
- Integrated ARM® Cortex M7 CPU

BLOCK DIAGRAM (Marvell 88Q6113)

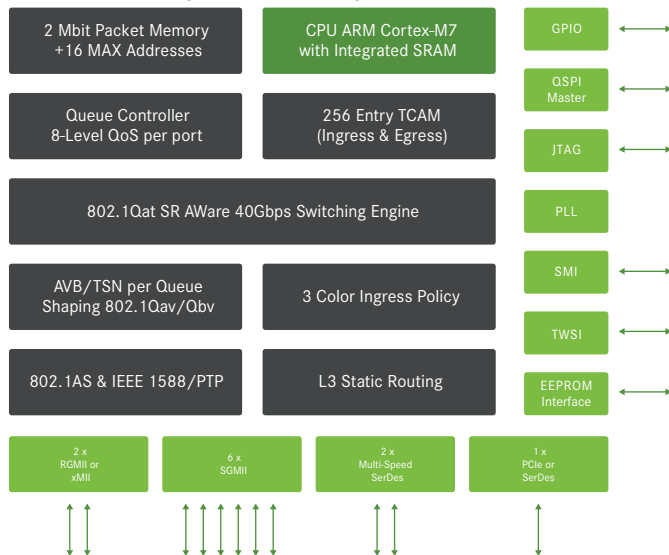

HARDWARE

Electrical characteristics

Supply voltage	Min.	Typ.	Max.
Operating	+8.0 V	-	+48.0 V
Absolute maximum (non-operating)	-60.0 V	-	+60.0 V
Supply current - operating	typ: 670 mA		

Physical characteristics

Connectors	1 x Binder 2pol. 1 x SFP+ 8 x H-MTD®
Weight approx.	625 g
Dimensions approx. L x W x H	166 x 124 x 36 mm

Environmental conditions

Temperature	Operating:	-40°C to +85°C
	Non-operating:	-40°C to +85°C
	Storage:	-40°C to +85°C
Relative Humidity	0% to 90% r. H., non-condensing	

SCOPE OF DELIVERY

- FL3X Switch 1000/10GBASE-T1 H-MTD®
- Power cable

ORDER INFORMATION FL3X SWITCH 1000BASE-T1 / 10GBASE-T1

Product	Description	Order number
FL3X Switc 1000/10GBASE-T1 H-MTD	8 port 1000BASE-T1/10GBASE-T1 switch	3-V1170A01

ORDER INFORMATION ASSECCORIES

Product	Description	Order number
FL3X SFP 1000BASE-T1	SFP transceiver for 100BASE-T1 and 1000BASE-T1	3-01110A01
10GBASE-T SFP+ copper module	10GBASE-T SFP+ copper module	10020420
10GBASE-T SFP+ optical module	10GBASE-T SFP+ optical module	10020432
1GBASE-T SFP copper module	1GBASE-T SFP copper module	10020431